



Q6 EDGE® 2.0
shown in *Lime Light*
with 30.5 cm (12") iLevel®
technology and Q-Logic 3
Advanced Drive Controls
with Bluetooth®

Q6 edge® 2.0

With features like standard 9.6 km/h (6 mph) motors and advanced responsiveness, the Q6 Edge® 2.0 is engineered to meet the performance needs of the most active user. The Q6 Edge 2.0 accepts a complete range of seating and electronics options to deliver exceptional rehab capability at an excellent value, and is available with our iLevel® technology.

QUANTUM®

Specifications

DRIVE WHEELS	Standard: 35.56 cm (14") Solid Optional: 35.56 cm (14") Pneumatic
CASTER WHEELS	Front: 15.24 cm (6") Solid Rear: 15.24 cm (6") Solid
ANTI-TIP WHEELS	N/A
MAXIMUM SPEED ¹	Up to 9.6 km/h (6 mph)
GROUND CLEARANCE	6.9 cm (2.7") (battery tray)
TURNING RADIUS ²	52.1 cm (20.5") with 15.24 cm (6") casters
OVERALL LENGTH ²	32.23" with 15.24 cm (6") casters 40.48" with 20 cm (8") casters
BASE WIDTH	62.2 cm (24.4")
SEATING SIZES	
Synergy®/TRU-Balance® 3 Static Seat	Width: 30 - 56 cm (12-22") Depth: 30 - 56 cm (12-22")
TRU-Balance® 3 Power Tilt	Width: 30.5 - 56 cm (12-22") Depth: 30.5 - 56 cm (12-22")
iLevel®	Width: 30.5 - 56 cm (12-22") Depth: 30.5 - 56 cm (12-22")
SEAT-TO-FLOOR HEIGHTS	
Synergy®/TRU-Balance® 3 Static Seat⁵	42 - 47 cm (16.5-18.5")
TRU-Balance® 3 Power Tilt ⁵	44 - 49.5 cm (17.5-19.5")
TRU-Balance® 3 Tilt & iLevel® ⁵	44 - 49.5 cm (17.5-19.5")
MANUAL RECLINE ⁶	Yes
BATTERY SIZE ³	NF-22, 55 AH
BATTERY WEIGHT ⁷	17.24 kg (38 lbs.)
AVAILABLE ELECTRONICS ⁸	120A Q-Logic 3
BATTERY CHARGER	8A Off-board
MOTOR PACKAGES	2-Pole Mid-Wheel 6®
WEIGHT CAPACITY ⁴	136 kg (300 lbs.)
BASE WEIGHT	63 kg (138.6 lbs.) with 15.24 cm (6") casters

- 1) Speed varies with user weight, terrain type, battery charge, battery condition and tyre pressure.
 2) Without front riggings
 3) Battery capacity may change when adding power positioning systems.
 4) Weight capacity is dictated by the selection of seating.
 5) All measurements +/- .3175 cm (1/8") with 46 x 46 cm (18" x 18") seat, fixed towers, 136 kg (300 lbs.) weight capacity and solid tyres (add .95 cm (3/8") with pneumatic tyres). Widths may increase seat-to-floor height. Contact Customer Service for details. Listed measurements are in the lowest position; does not include elevating system unless specified.
 6) Maximum dimensions of the Manual Recline vary by power base and seating system. Call for details.
 7) Battery weight may vary +/- 1.4 kg (3 lbs.) based on manufacturer.
 8) All Quantum Rehab® units can be ordered with specialty controls.
 9) Call for availability.


Features

- Standard 9.6 km/h (6 mph) motors offer advanced performance, precise control and responsiveness via innovative single-stage gearbox
- Bold aesthetics
- iLevel® option available with up to 30.5 cm (12") of seat elevation at walking speed (up to 5.6 km/h (3.5 mph))
- iLevel is retrofittable on the Q6 Edge® 2.0

Options

- iLevel® option allows 30.5 cm (12") of seat elevation while at walking speed (5.6 km/h (3.5 mph))
- Q-Logic 3 EX Drive Controls
- TRU-Balance® 3 Seating
- TRU-Comfort 2 Seating
- LED fender lights
- Accu-Trac Advanced Tracking Technology
- Trilogy vent tray⁹
- Compact vent tray⁹

Colours

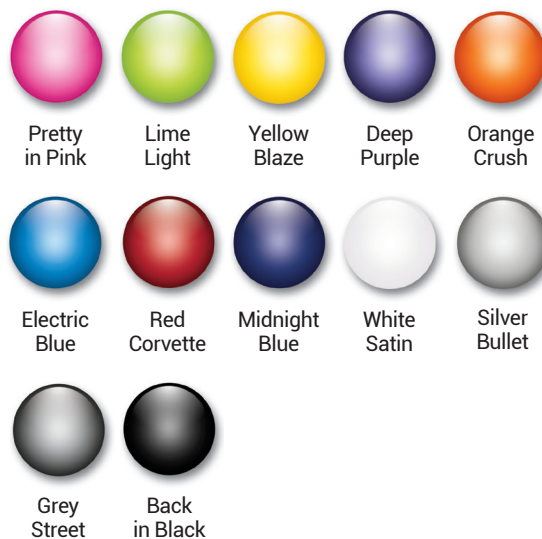

Pride®
 Mobility Products
 Australia Pty. Ltd.

QUANTUM®

(TEL) 03 8770 9600 | (FAX) 03 9703 2720

quantumrehab.com

